

TOGGLE SWITCH


Toggle Switch



Specifications


Rating: 10A 125V AC; 6A 250V AC; 15A 125V AC; 10A 250V AC; 20A 125V AC; 15A 250V AC | Contact Resistance: 50mΩ Max |
Insulation Resistance: 500VDC 1000M Ω min | Dielectric Strength: 1500V AC for one minute | Operation Temperature: -25°C to +85°C
| Electrical Life: ≥ 10,000 Cycles

T3-3A

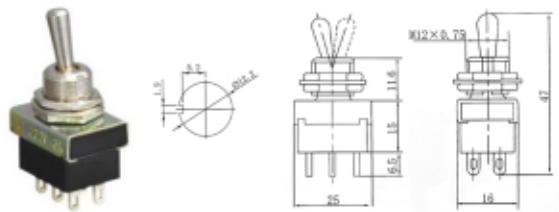


T3-3A ON-ON
DPDT 6P
6A 125VAC; 3A 250VAC

T3-1

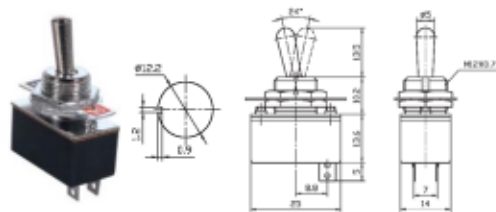


T3-1 ON-OFF
SPST 2P
4A 125VAC; 2A 250VAC

T3-2

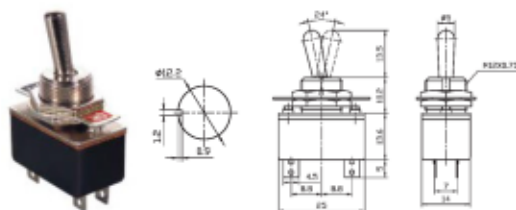


T3-2 ON-ON
SPDT 4P
4A 125VAC; 2A 250VAC

T3-3

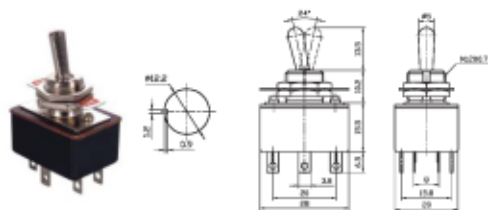


T3-3 ON-ON
DPDT 6P
5A 125VAC; 3A 250VAC

TS-1

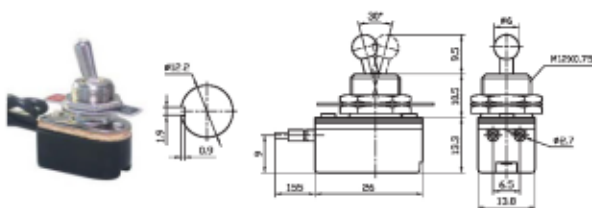


TS1 ON-OFF
SPST 2P
6A 125VAC; 3A 250VAC; 10A 12VAC

TS-2

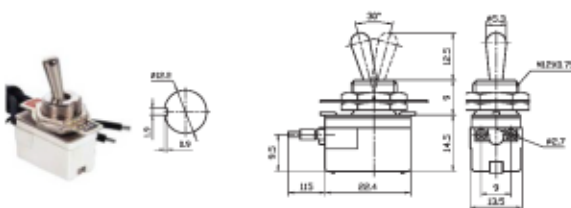


TS-2 ON-OFF
SPST 2P
6A 125VAC; 3A 250VAC; 10A 12VDC

TH-1

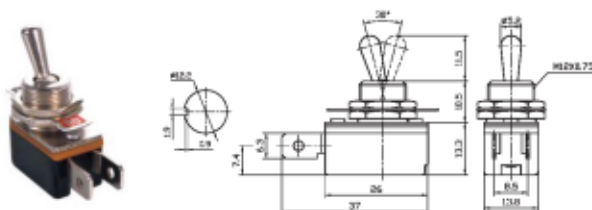

TH-1 ON-OFF
SPST 2P
6A 125VAC; 3A 250VAC; 10A 12VDC

TH-1S

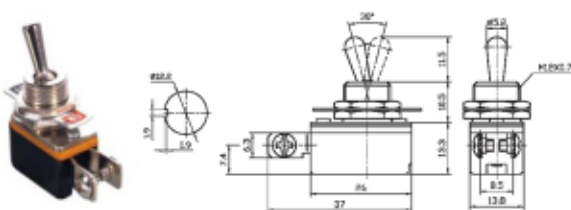

TH-1S ON-OFF
SPST 2P (Screw Terminals)
6A 125VAC; 3A 250VAC; 10A 12VDC