


Rating: 6A 125VAC ; 3A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min


Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C ~ +85°C
Electrical Life: $\geq 10,000$ Cycles

A-TOP5-101

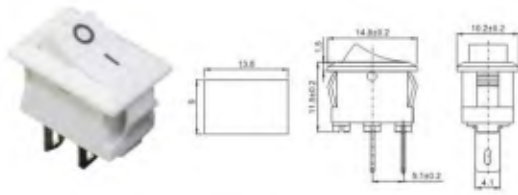


A-TOP5-101 ON-OFF

A-TOP5-103

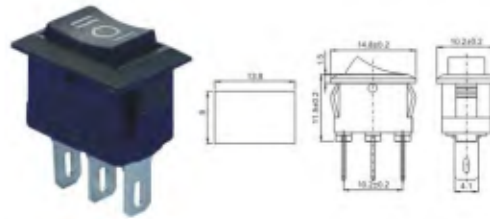

A-TOP5-103 ON-OFF-ON

A-TOP5-102

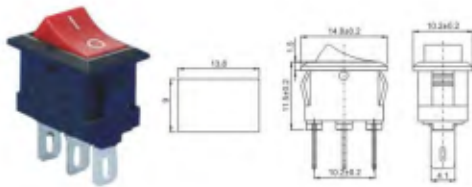

A-TOP5-102 ON-ON

A-TOP5-101L / 102L




A-TOP5-101 L ON-OFF 2P
A-TOP5-102 L ON-ON 3P

A-TOP5-1510




A-TOP5-1510

A-TOP5-2-102

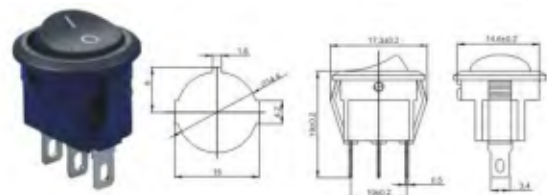


A-TOP5-2-102 ON-ON

A-TOP5-2-101

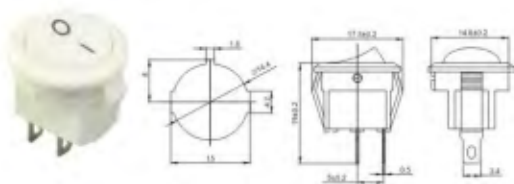

A-TOP5-2-101 ON-OFF

A-TOP5-2-101N

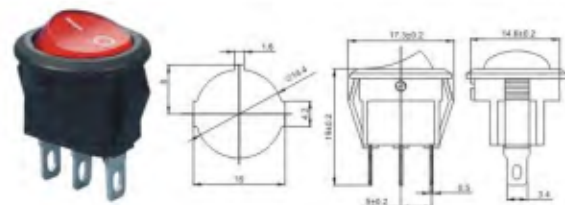

A-TOP5-2-101N ON-OFF