


## SWTA6301HX-180L/250L



1. Rating : DC 12V, 50mA
2. Travel :  $0.25 \pm 0.1$  mm/m
3. Operating Force :  $180 \pm 30$  gf  
or  $250 \pm 50$  gf
4. Contact Resistance :  $100\text{m} \Omega$  MAX
5. Life : 50,000 or 30,000 Cycles

| Part No:   | L     |
|------------|-------|
| SWTA6301H  | 4.3mm |
| SWTA6301HA | 5.0mm |

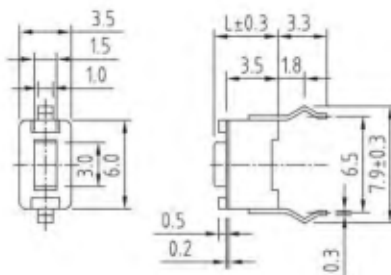


## SWTA6301RX-180L/250L



1. Rating : DC 12V, 50mA
2. Travel :  $0.25 \pm 0.1$  mm/m
3. Operating Force :  $180 \pm 30$  gf  
or  $250 \pm 50$  gf
4. Contact Resistance :  $100\text{m} \Omega$  MAX
5. Life : 50,000 or 30,000 Cycles

| Part No:   | L     |
|------------|-------|
| SWTA6301R  | 4.3mm |
| SWTA6301RA | 5.0mm |

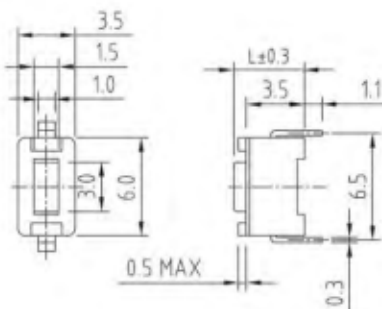


## SWTA6301SX-180L/250L



1. Rating : DC 12V, 50mA
2. Travel :  $0.25 \pm 0.1$  mm/m
3. Operating Force :  $180 \pm 30$  gf  
or  $250 \pm 50$  gf
4. Contact Resistance :  $100\text{m} \Omega$  MAX
5. Life : 50,000 or 30,000 Cycles

| Part No:    | L     | PEG  |
|-------------|-------|------|
| SWTA6301S   | 4.3mm | With |
| SWTA6301SA  | 5.0mm | with |
| SWTA6301NS  | 4.3mm | W/O  |
| SWTA6301NSA | 5.0mm | W/O  |



## SWTA6301UX-180L/250L



1. Rating : DC 12V, 50mA
2. Travel :  $0.25 \pm 0.1$  mm/m
3. Operating Force :  $180 \pm 30$  gf  
or  $250 \pm 50$  gf
4. Contact Resistance :  $100\text{m} \Omega$  MAX
5. Life : 50,000 or 30,000 Cycles

| Part No:   | L     |
|------------|-------|
| SWTA6301U  | 4.3mm |
| SWTA6301UA | 5.0mm |

