

Ø 22 mm


## I-TOP-22-11E



Diameter: Ø 22mm  
Color: R, G, Y, O, B, W  
Switch Rating: 5A/250VAC  
Contact Configuration: 1NO 1NC  
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat  
Lamp type: Ring illuminated (LED)  
The Crust Material: Stainless steel  
IP Degree: IP67, IK10

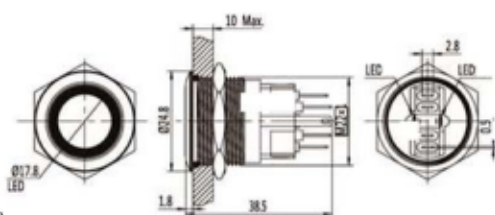


## I-TOP-22-11D



Diameter: Ø 22mm  
Color: R, G, Y, O, B, W  
Switch Rating: 5A/250VAC  
Contact Configuration: 1NO 1NC  
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat  
Lamp type: Dot illuminated (LED)  
The Crust Material: Stainless steel  
IP Degree: IP67, IK10

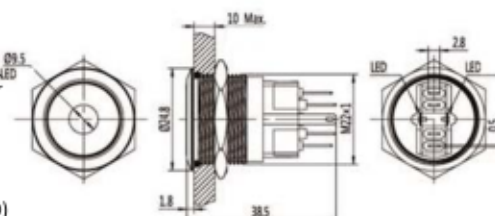


## I-TOP-22-11EP



Diameter: Ø 22mm  
Color: R, G, Y, O, B, W  
Switch Rating: 5A/250VAC  
Contact Configuration: 1NO 1NC  
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat  
Lamp type: Power symbol illuminated (LED)  
The Crust Material: Stainless steel  
IP Degree: IP67, IK10

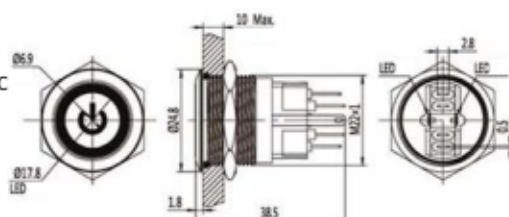

## I-TOP-S1-22F



Diameter: Ø 22mm  
Switch Rating: 5A/250VAC  
Contact Configuration: 1NO 1NC / 2NO 2NC  
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat  
The Crust Material: Stainless steel  
IP Degree: IP67, IK10

