

Ø 22 mm


I-TOP-22-11E



Diameter: Ø 22mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration: 1NO 1NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat
Lamp type: Ring illuminated (LED)
The Crust Material: Stainless steel
IP Degree: IP67, IK10

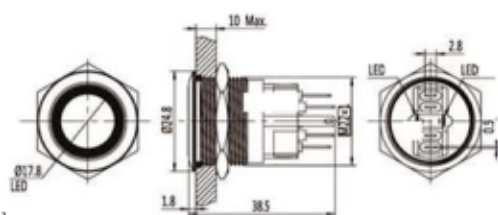


I-TOP-22-11D



Diameter: Ø 22mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration: 1NO 1NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat
Lamp type: Dot illuminated (LED)
The Crust Material: Stainless steel
IP Degree: IP67, IK10

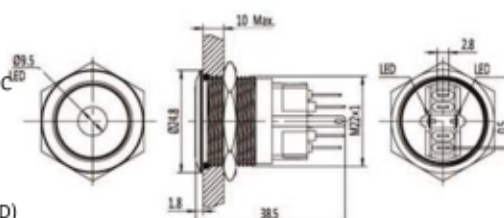


I-TOP-22-11EP



Diameter: Ø 22mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration: 1NO 1NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat
Lamp type: Power symbol illuminated (LED)
The Crust Material: Stainless steel
IP Degree: IP67, IK10

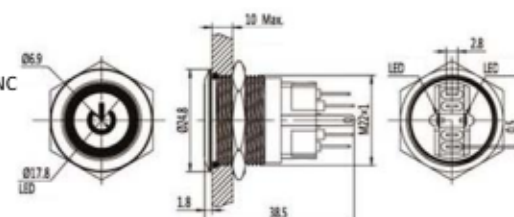

I-TOP-S1-22F



Diameter: Ø 22mm
Switch Rating: 5A/250VAC
Contact Configuration: 1NO 1NC / 2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat
The Crust Material: Stainless steel
IP Degree: IP67, IK10

