

Ø 22 mm


I-TOP-S1-22F-E



Diameter: Ø 22mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC/2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)


The Front Shape: Flat
Lamp type: Ring illuminated (LED)
The Crust Material: Stainless steel
IP Degree: IP67, IK10

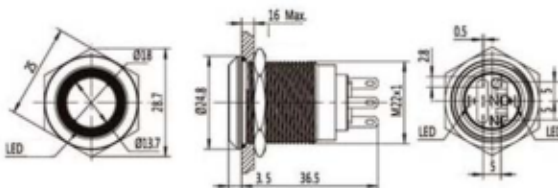

I-TOP-S1-22B-SR



Diameter: Ø 22mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration: 1NO 1NC
Operation Type: Push-Lock Turn-reset
The Front Shape: Ball
Light way: Arrow
The Crust Material: Stainless steel
IP Degree: IP65, IK10

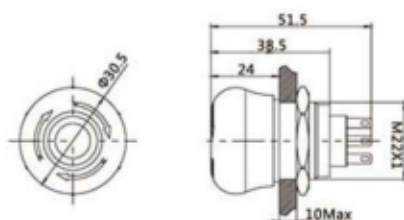


I-TOP-S1-AWY



Diameter: Ø 22mm
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC /2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat
The Crust Material: Stainless steel
IP Degree: IP67, IK10

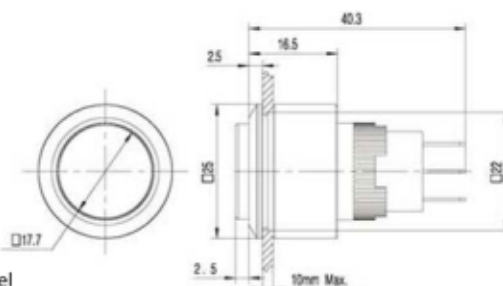

I-TOP-S1-AWX



Diameter: Ø 22mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC / 2NO 2NC
Operation Type:

- Momentary
- Maintained(Z)

Lamp type: Flat illuminated (LED)
The Front Shape: Flat
The Crust Material: Stainless steel
IP Degree: IP67, IK10

