


Ø 22 mm

I-TOP-S1-22F-E




Diameter: Ø 22mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration: 1NO 1NC/2NO 2NC
Operation Type:
• Momentary
• Maintained(Z)
The Front Shape: Flat
Lamp type: Ring illuminated (LED)
The Crust Material: Stainless steel
IP Degree: IP67, IK10

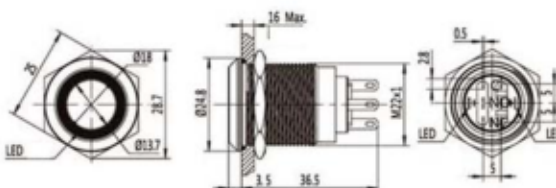

I-TOP-S1-22B-SR




Diameter: Ø 22mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration: 1NO 1NC
Operation Type: Push-Lock Turn-reset
The Front Shape: Ball
Light way: Arrow
The Crust Material: Stainless steel
IP Degree: IP65, IK10

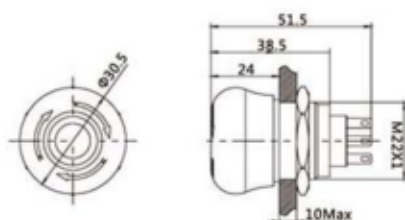

I-TOP-S1-AWY



Diameter: Ø 22mm
Switch Rating: 5A/250VAC
Contact Configuration: 1NO 1NC/2NO 2NC
Operation Type:
• Momentary
• Maintained(Z)
The Front Shape: Flat
The Crust Material: Stainless steel
IP Degree: IP67, IK10

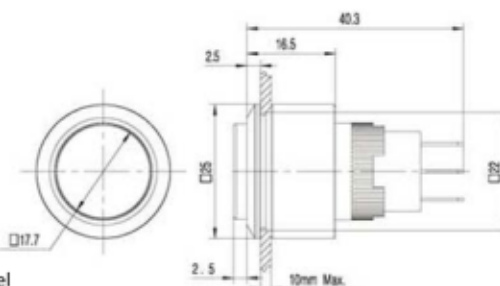

I-TOP-S1-AWX



Diameter: Ø 22mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration: 1NO 1NC/2NO 2NC
Operation Type:
• Momentary
• Maintained(Z)
Lamp type: Flat illuminated (LED)
The Front Shape: Flat
The Crust Material: Stainless steel
IP Degree: IP67, IK10

