


Ø 22 mm

I-TOP-S1-22F-E




Diameter: Ø 22mm
 Color: R, G, Y, O, B, W
 Switch Rating: 5A/250VAC
 Contact Configuration: 1NO 1NC/2NO 2NC
 Operation Type:
 • Momentary
 • Maintained(Z)
 The Front Shape: Flat
 Lamp type: Ring illuminated (LED)
 The Crust Material: Stainless steel
 IP Degree: IP67, IK10

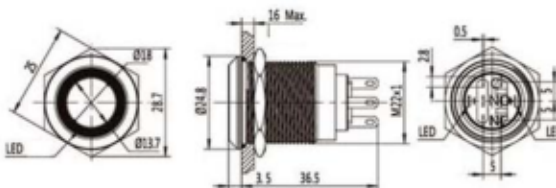

I-TOP-S1-22B-SR




Diameter: Ø 22mm
 Color: R, G, Y, O, B, W
 Switch Rating: 5A/250VAC
 Contact Configuration: 1NO 1NC
 Operation Type: Push-Lock Turn-reset
 The Front Shape: Ball
 Light way: Arrow
 The Crust Material: Stainless steel
 IP Degree: IP65, IK10

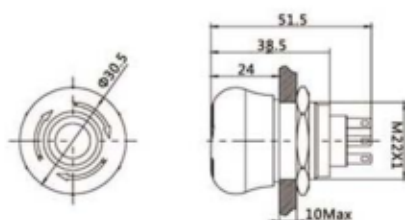

I-TOP-S1-AWY



Diameter: Ø 22mm
 Switch Rating: 5A/250VAC
 Contact Configuration: 1NO 1NC/2NO 2NC
 Operation Type:
 • Momentary
 • Maintained(Z)
 The Front Shape: Flat
 The Crust Material: Stainless steel
 IP Degree: IP67, IK10

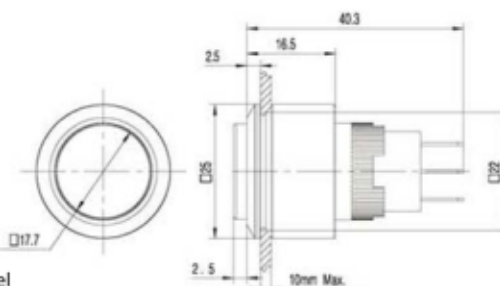

I-TOP-S1-AWX



Diameter: Ø 22mm
 Color: R, G, Y, O, B, W
 Switch Rating: 5A/250VAC
 Contact Configuration: 1NO 1NC/2NO 2NC
 Operation Type:
 • Momentary
 • Maintained(Z)
 Lamp type: Flat illuminated (LED)
 The Front Shape: Flat
 The Crust Material: Stainless steel
 IP Degree: IP67, IK10

