


Ø 28 mm

S-TOP-28B




Diameter: Ø 28mm
 Switch Rating: 5A/250VAC
 Contact Configuration:
 1NO 1NC /2NO 2NC
 Operation Type:
 • Momentary
 • Maintained(Z)
 The Front Shape: Ball
 The Crust Material: Stainless st
 IP Degree: IP67, IK10

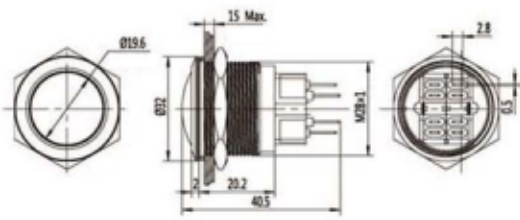

S-TOP-28H




Diameter: Ø 28mm
 Switch Rating: 5A/250VAC
 Contact Configuration:
 1NO 1NC /2NO 2NC
 Operation Type:
 • Momentary
 • Maintained(Z)
 The Front Shape: Flat
 The Crust Material: Stainless steel
 IP Degree: IP67, IK10

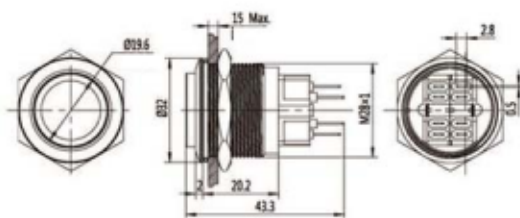

S-TOP-28F-E



Diameter: Ø 28mm
 Color: R, G, Y, O, B, W
 Switch Rating: 5A/250VAC
 Contact Configuration:
 1NO 1NC /2NO 2NC
 Operation Type:
 • Momentary
 • Maintained(Z)
 Lamp type: Ring illuminated (LED)
 The Front Shape: Flat
 The Crust Material: Stainless steel
 IP Degree: IP67, IK10

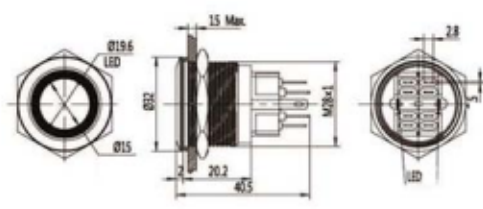

S-TOP-28F-D



Diameter: Ø 28mm
 Switch Rating: 5A/250VAC
 Contact Configuration:
 1NO 1NC /2NO 2NC
 Operation Type:
 • Momentary
 • Maintained(Z)
 Lamp type: Dot illuminated (LED)
 The Front Shape: Flat
 The Crust Material: Stainless steel
 IP Degree: IP67, IK10

