


Ø 28 - 30 mm

S-TOP-28F-EP




Diameter: Ø 28mm
 Color: R, G, Y, O, B, W
 Switch Rating: 5A/250VAC
 Contact Configuration:
 1NO 1NC/2NO 2NC
 Operation Type:
 • Momentary
 • Maintained(Z)
 The Front Shape: Flat
 Lamp type: Power symbol
 illuminated (LED)
 The Crust Material: Stainless steel
 IP Degree: IP67, IK10

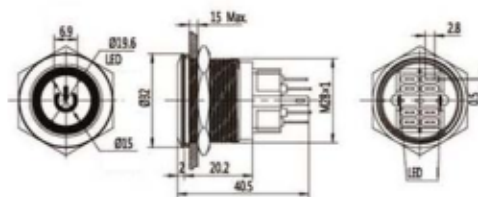

S-TOP-30F




Diameter: Ø 30mm
 Switch Rating: 5A/250VAC
 Contact Configuration:
 1NO 1NC/2NO 2NC
 Operation Type:
 • Momentary
 • Maintained(Z)
 The Front Shape: Flat
 The Crust Material: Stainless steel
 IP Degree: IP67, IK10

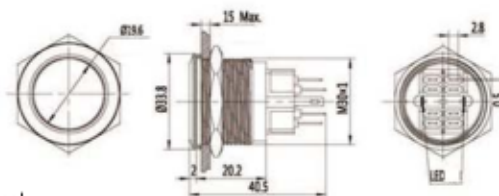

S-TOP-30F-D



Diameter: Ø 30mm
 Color: R, G, Y, O, B, W
 Switch Rating: 5A/250VAC
 Contact Configuration:
 1NO 1NC/2NO 2NC
 Operation Type:
 • Momentary
 • Maintained(Z)
 The Front Shape: Flat
 Lamp type: Dot illuminated (LED)
 The Crust Material: Stainless steel
 IP Degree: IP67, IK10

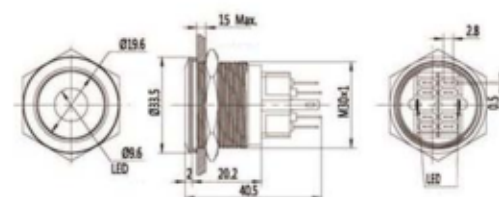

S-TOP-30F-E



Diameter: Ø 30mm
 Switch Rating: 5A/250VAC
 Contact Configuration:
 1NO 1NC/2NO 2NC
 Operation Type:
 • Momentary
 • Maintained(Z)
 The Front Shape: Flat
 Lamp type: Ring illuminated (LED)
 The Crust Material: Stainless steel
 IP Degree: IP67, IK10

