

Ø 40 mm

S-TOP-40F



Diameter: Ø 40mm
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC /2NO 2NC


Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat

The Crust Material: Stainless steel

IP Degree: IP67, IK10

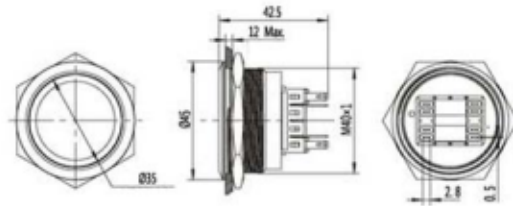

S-TOP-40B



Diameter: Ø 40mm
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC /2NO 2NC


Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Ball

The Crust Material: Stainless steel

IP Degree: IP67, IK10

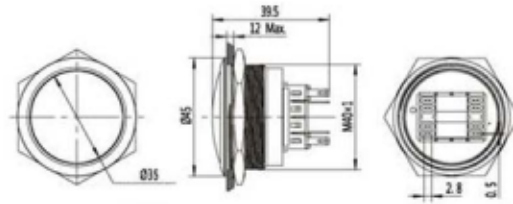

S-TOP-40H



Diameter: Ø 40mm
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC /2NO 2NC


Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: High

The Crust Material: Stainless steel

IP Degree: IP67, IK10

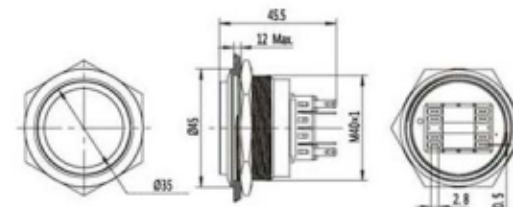

S-TOP-40F-E



Diameter: Ø 40mm
Color: R, G, Y, O, B, W
Switch Rating: 5A/250VAC
Contact Configuration:
1NO 1NC /2NO 2NC

Operation Type:

- Momentary
- Maintained(Z)

Lamp type: Ring illuminated (LED)

The Front Shape: Flat

The Crust Material: Stainless steel

IP Degree: IP67, IK10

