





Box Header 2.0mm Elevated SMT Type

Specifications

Current Rate:2.0 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C


Material

Insulator:Polyester, UL 94V-0
* Standard: Nylon 6T
Terminal:Copper Alloy
Plating:Gold Plated

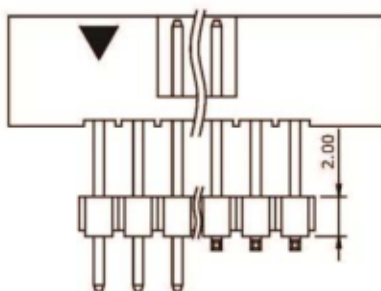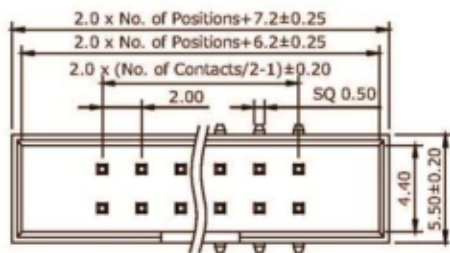

ORDER INFORMATION

Part No.:BH2EM-XX-U

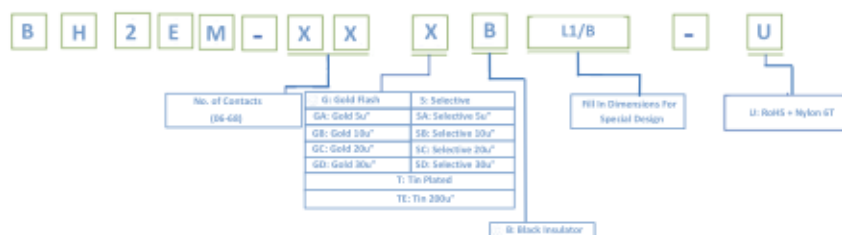

©:Standard Recommend