





Box Header 1.27x1.27mm Right Angle Type

Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Polyester, UL 94V-0
* Standard: Nylon 6T
Terminal:Copper Alloy
Plating:Gold Plated

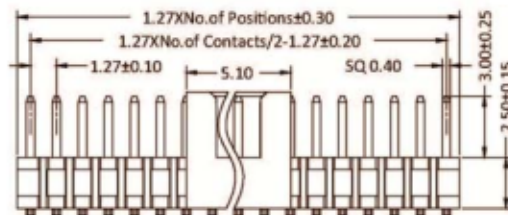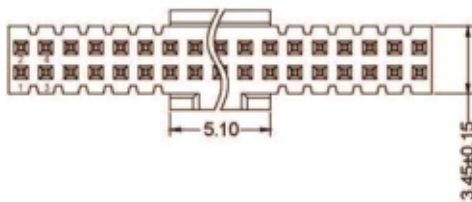

Part No.:BPH3R-XX-U

ORDER INFORMATION



©:Standard Recommend