

Ejector Header 2.54mm SMT Type

Specifications

Current Rate:3 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C




Material

Insulator:Polyester, UL 94V-0

※ Standard: PBT or Nylon 6T

Terminal:Copper Alloy

Plating:Gold Plated

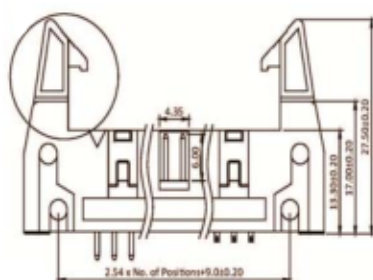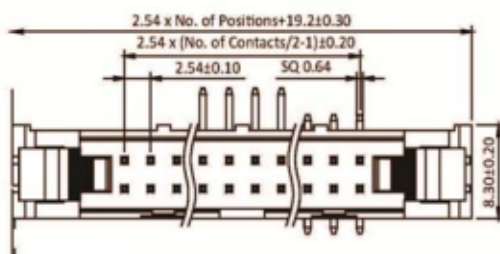

ORDER INFORMATION

Part No.:EDH1M-XX-L/U

E	D	H	1	M	-	X	X	X	B	X	-	X			
No. of Contacts (10-64)						G: Gold Flash GA: Gold 5u" GB: Gold 10u" GC: Gold 20u" GD: Gold 30u"		S: Selective SA: Selective 5u" SB: Selective 10u" SC: Selective 20u" SD: Selective 30u"		B: Black Insulator		1: Long Ejector 2: Short Ejector		L: Rant + PBT U: Rant + Nylon 6T	
T: Tin Plated															
TE: Tin 200u"															