Ejector Header 2.0 mm

RoHS

Ejector Header 2.0mm H= 7.2mm SMT Type

Specifications
Current Rate:2.0 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material
Insulator:Polyester, UL 94V-0
◎ Standard: LCP
Terminal:Copper Alloy
Plating:Gold Plated



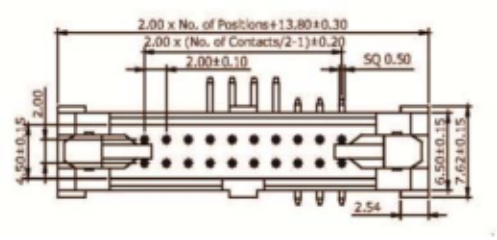



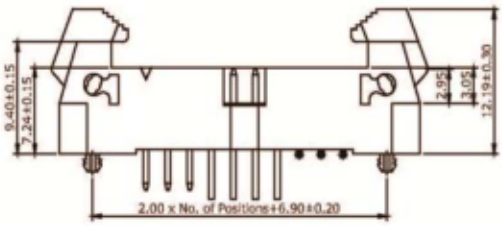



Part No.:EDH2AM-XX-U

ORDER INFORMATION

E D H 2 A M - X X X B - U

No. of Contacts (06-64)			B: Black Insulator	U: RoHS + LCP
	D: Gold Flash	S: Selective		
	GA: Gold 5u"	SA: Selective 5u"		
	GB: Gold 10u"	SB: Selective 10u"		
	GC: Gold 20u"	SC: Selective 20u"		
	GD: Gold 30u"	SD: Selective 30u"		
	T: Tin Plated			
	TE: Tin 200u"			

◎:Standard Recommend