

Ejector Header 2.0 mm



RoHS




Ejector Header 2.0mm H= 5.6mm Elevated SMT Type

Specifications

Current Rate: 2.0 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0
 ◎ Standard: Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated

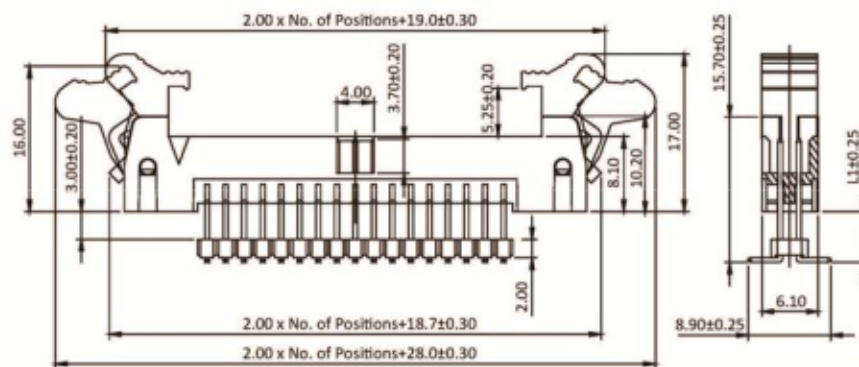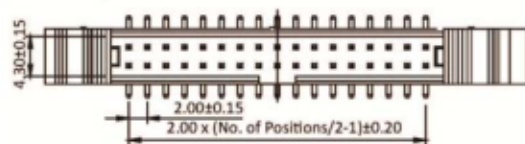

Part No.: EDH2EM-XX-U

ORDER INFORMATION

E	D	H	2	E	M	-	X	X	X	B	-	1	-	U	
No. of Contacts (10-64)							G: Gold Plated GA: Gold 1u" GB: Gold 10u" GC: Gold 20u" GD: Gold 30u"			S: Selective SA: Selective 5u" SB: Selective 10u" SC: Selective 20u" SD: Selective 30u"			B: Black Insulator		U: RoHS + Nylon 6T
T: Tin Plated TS: Tin 200u"															

©:Standard Recommend