

# MICRO SWITCH


## Sub-Mini Micro Switch



### Specifications

Rating: 3A 125V AC; 1.5A 250V AC Contact | Resistance: 20mΩ Max | Insulation Resistance: 500VDC 1000M Ω min |  
Dielectric Strength: 1000V AC for one minute | Operation Temperature: -25°C to +85°C | Electrical Life: ≥10,000 Cycles


### MI-10

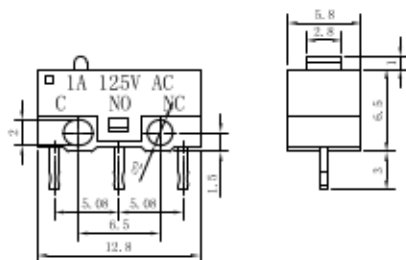

MI10-Z0P075  
MI10-CZ0P075  
MI10-DZ0P075  
MI10-EZ0P075

1A 125VAC  
3A 250VAC  
2A 125VAC  
3A 125VAC


### MI-11

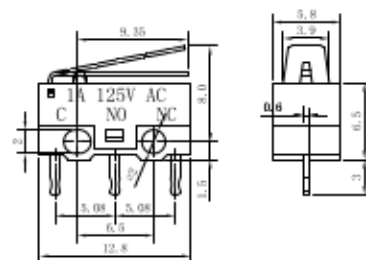

MI11-Z1P075  
MI11-CZ1P075  
MI11-DZ1P075  
MI11-EZ1P075

1A 125VAC  
3A 250VAC  
2A 125VAC  
3A 125VAC


### MI-12

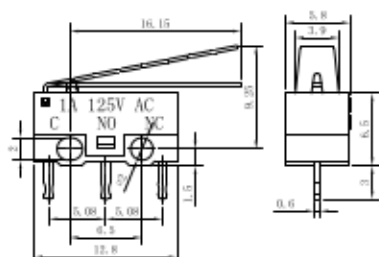

MI12-Z2P075  
MI12-CZ2P075  
MI12-DZ2P075  
MI12-EZ2P075

1A 125VAC  
3A 250VAC  
2A 125VAC  
3A 125VAC


### MI-13

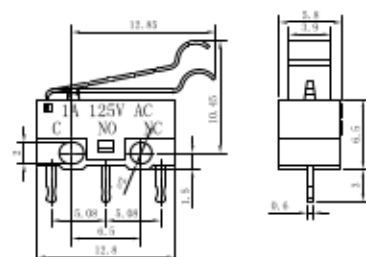

MI13-Z3P075  
MI13-CZ3P075  
MI13-DZ3P075  
MI13-EZ3P075

1A 125VAC  
3A 250VAC  
2A 125VAC  
3A 125VAC


### MI-14



MI14-Z4P075  
MI14-CZ4P075  
MI14-DZ4P075  
MI14-EZ4P075

1A 125VAC  
3A 250VAC  
2A 125VAC  
3A 125VAC

### MI-15

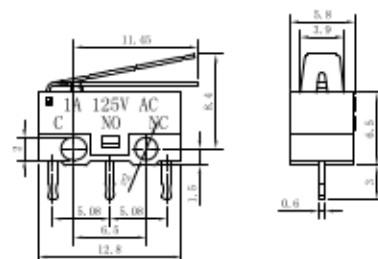

MI15-Z5P075  
MI15-CZ5P075  
MI15-DZ5P075  
MI15-EZ5P075

1A 125VAC  
3A 250VAC  
2A 125VAC  
3A 125VAC