TOGGLE SWITCH

Toggle Switch

Specifications

Rating: 6A 125V AC; 3A 250V AC | Contact Resistance: 20mΩ Max | Insulation Resistance: 500VDC 1000M Ω min | Dielectric Strenght: 1500V AC for one minute | Operation Temperature: -25°C to +85°C | Electrical Life: ≥ 10.000 Cycles

TP-101-111

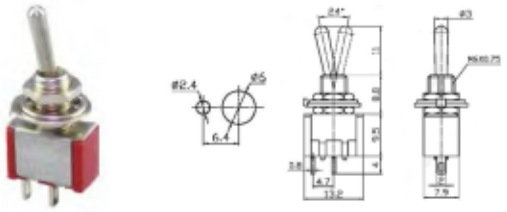

TP-101 ON-OFF
TP-111 OFF-(ON)
SPST 2P

TP-102-103-112-113-123

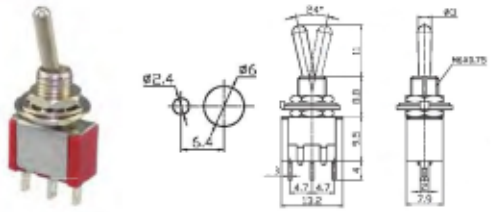

TP-102 ON-ON
TP-103 ON-OFF-ON
TP-112 ON-(ON)

TP-113 ON-OFF-(ON)
TP-123 (ON)-OFF-(ON)
SPDT 3P

TP-201-211

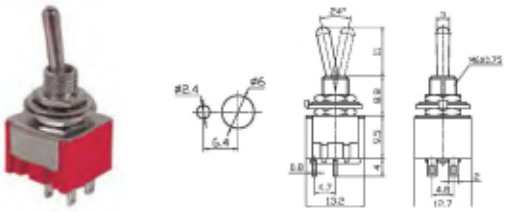

TP-201 ON-OFF
TP-211 OFF-(ON)
DPST 4P

TP-202-203-2033-212-213-223

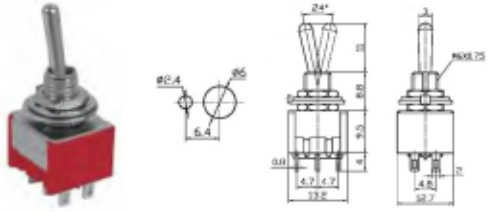

TP-202 ON-ON
TP-203 ON-OFF-ON
TP-2033 ON-(ON)

TP-212 ON-(ON)
TP-213 ON-OFF-(ON)
TP-223 (ON)-OFF-(ON)
DPDT 6P

TP-302-303

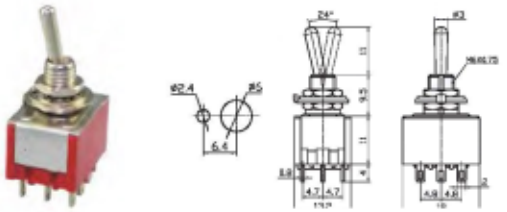

TP-302 ON-ON
TP-303 ON-OFF-ON
3PDT 9P

TP-402-403

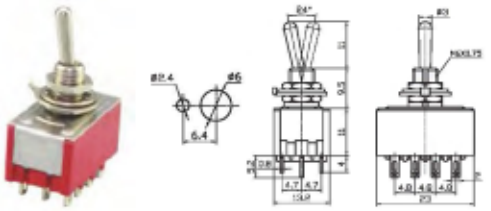

TP-402 ON-ON
TP-403 ON-OFF-ON
4PDT 12P

TP-101-111-A2

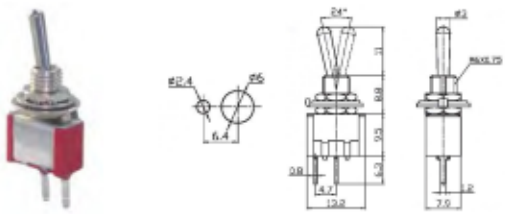

TP-101-A2 ON-OFF
TP-111-A2 OFF(ON)
SPST 2P

TP-102-103-112-113-123-A2

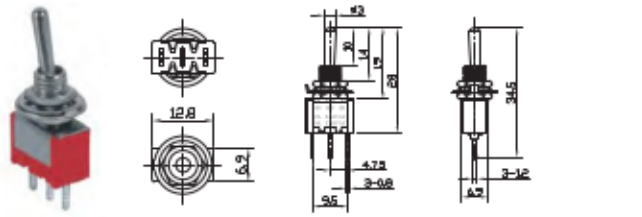

TP-102-A2 ON-ON
TP-103-A2 ON-OFF-ON
TP-112-A2 ON-(ON)

TP-113-A2 ON-OFF-(ON)
TP-123-A2 (ON)-OFF-(ON)
SPDT 3P